

Frame Measurement Sheet



659 Grissom Pkwy., Myrtle Beach, SC 29577
(843) 946-3500 Fax (843) 946-3508

Instructions:

- Letters A-K, Check all boxes that apply.
- Write your dimensions in the "Frame" and "Door" box.
- Write the type of hardware you would like in the Hardware Section.

A. Strike

- ASA
- Blank
- Deadbolt Strike
- ASA & Deadbolt
- Other _____

B. Frame Type

- Single
- Pair
- Cased Opening
- Borrowed Lite
- Sidelite
- Transom Frame
- Transom & Sidelite

C. Hinge

- 4.5" Standard Duty
- 4.5" Heavy Duty
- 5.0" Standard Duty
- 5.0" Heavy Duty
- No Hinge Prep
- Other _____

D. Fire Label

- 3 Hour
- 90 Minute
- 45 Minute

E. Material

- 16 Gage Cold Rolled Steel
- 16 Gage A60 Galvanneal
- 14 Gage Cold Rolled Steel
- 14 Gage A60 Galvanneal

F. Transom/Sidelite

- 1/4" Wire Glass
- 1/4" Tempered Glass
- 1-3/4" Hollow Metal Panel
- Other _____

G. Dimensions

- Net Frame Size
- Rough Opening
- Opening Width*: _____
- Opening Height*: _____
- Jamb Depth: _____
- Throat _____
- Head Face: _____
- Jamb Face: _____
- Notes: _____

H. Anchor

- Compression Anchors (Drywall Frame)
- Existing Opening (Punch & Dimple)
- Metal Stud
- Masonry "T"
- Wood Stud
- No Anchors

I. Construction


- Knock Down
- Welded

Hardware:


Qty.	Mfg.	Item (Part # or Description)	Finish	Supplied by IDN	Prep per template (Must Supply Template)
				<input type="checkbox"/>	<input type="checkbox"/>
				<input type="checkbox"/>	<input type="checkbox"/>
				<input type="checkbox"/>	<input type="checkbox"/>
				<input type="checkbox"/>	<input type="checkbox"/>

Date: _____
 Customer: _____
 PO#: _____
 Order Quote
 Quote#: _____
 Acct#: _____
 Contact: _____

* For both width and height, measure opening at several points and record tightest dimension.
Opening Dimensions:
 Provide measurement in "G". Measure opening from Brick to Brick and from Floor to underside of Lintel.

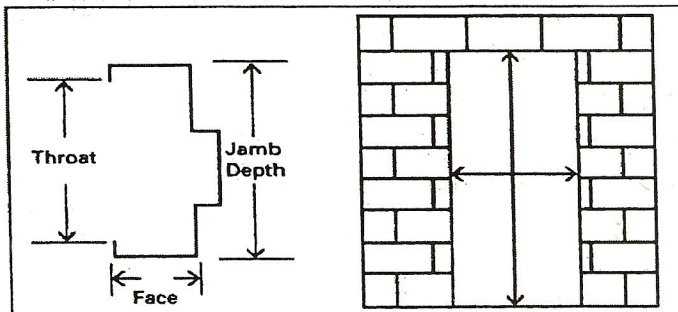

J. Handling

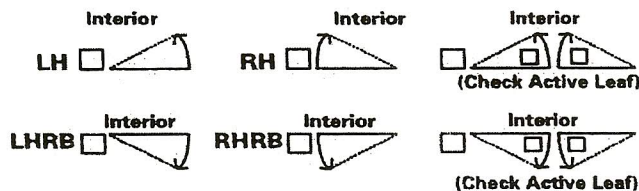

K. Frame Profiles

